



ADDENDUM NO. 1

PROJECT: Roy Lake State Park Trailer Dump Station
OWNER: South Dakota Game Fish and Parks
TO: Plan Holders
FROM: Scott Schweitzer, P.E. Brosz Engineering
DATE: May 13, 2022

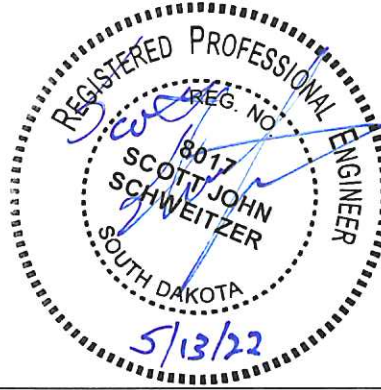

SCOPE OF THIS ADDENDUM

The purpose of this addendum is to add a quantity of imported embankment material in the event that suitable excavated material is insufficient and for other corrections and clarifications to the plans.

BID DOCUMENT CHANGES

- 1) Bid Form
 - a. Replace Bid and Modification forms with attached Revised Bid and Modification forms.

PLAN CHANGES

- 1) Sheet 2
 - a. ADD Bid Item (1.36) IMPORTED COMPACTED EMBANKMENT, CUBIC YARDS, Qty. 100
 - b. On the typical pavement section, the 24" Compacted Sub Base shall consist of item 1.09, COMPACTED EMBANKMENT, and item 1.36, IMPORTED COMPACTED EMBANKMENT if it is necessary to import additional embankment material.
 - c. CHANGE Bid Item (1.24) 1.5" PVC WATER SERVICE LINE FURNISHED AND INSTALLED. Remove the word PVC. Bid Item shall be named 1.5" WATER SERVICE LINE FURNISHED AND INSTALLED.
- 2) Sheet 3
 - a. The plan note, IMPORTED COMPACTED EMBANKMENT, shall apply to the bid item (1.36) IMPORTED COMPACTED EMBANKMENT added by this addendum.
- 3) Sheet 4
 - a. Replace Water Services note with the following:
All labor and materials required to tie into the existing water service shall be incidental to the contract bid item "Existing Water Supply Line Location and Tie-In".
Tracer Wire shall be installed on all water line. All costs to furnish and install the tracer wire shall be incidental to the contract unit price per linear foot for "1.5" Water Service Line Furnished and Installed".
Water lines shall be SDR-21 PVC or 200PSI HDPE.
All water lines shall have a minimum bury depth of 72 inches.
Curb boxes are incidental to curb stops.
Thrust blocks are incidental to the item they are supporting.
- 4) Sheet 20
 - a. Septic tank inlet and outlet and inspection pipes must be 6" SCH 40 PVC.

REVISED BID FORM

**Trailer Dump Station
Roy Lake State Park
Marshall County, South Dakota
GFP Project No. RoyW20Pa**

Date: _____

To: SD Game, Fish & Parks Engineering Supervisor
Joe Foss Building, 523 East Capitol, Pierre, South Dakota 57501

Phone: 605-773-6082

The undersigned, being familiar with the local conditions affecting the work, and with the Contract Documents, including the Invitation to Bid, Instructions to Bidders, Bid Form, Explanation of Alternates, Modification to Bid Form, Bid Bond Form, Performance and Payment Bond, Acknowledgment of Surety, Sample Certification of Surety, Non-Resident Bidder Affidavit, Form of Agreement for Construction, General Conditions, Special Conditions, Technical Specifications, Plans and Addenda which govern the purchase of material and labor and the awarding of contracts hereby proposes to do all the work and provide all the material and equipment which pertains to Trailer Dump Station, Custer State Park, Blue Bell Campground, Custer County, South Dakota, GFP Project No. Blue200a.

Trailer Dump Station, RoyW20Pa

Item No.	Item Description	Unit	Est. Units	Unit Price	Extended Amount
1.00	Mobilization	LS	1	\$	\$
1.01	Tree Removal and In-Park Disposal	EA	5	\$	\$
1.02	Clearing and Grubbing and In-Park Disposal	LS	1	\$	\$
1.03	Remove and Replace Topsoil	LS	1	\$	\$
1.04	Sawcutting Asphalt Pavement	LF	290	\$	\$
1.05	Existing Asphalt Surfacing Removal and Off-Site Disposal	SY	167	\$	\$
1.06	Unclassified Excavation and Material Salvage	CY	330	\$	\$
1.07	Unclassified Excavation – Undercut	CY	813	\$	\$
1.08	Sewer Line Trench Excavation	CY	207	\$	\$
1.09	Compacted Embankment	CY	105	\$	\$
1.10	Ordinary Shaping	SY	1401	\$	\$
1.11	Base Course Furnished and Installed	TON	533	\$	\$

1.12	Geotextile Separator Fabric	SQ	1100	\$	\$
1.13	Asphalt Concrete Composite, Type E2 Furnished and Installed	TON	190	\$	\$
1.14	Seeding and Fertilizing	SY	623	\$	\$
1.15	12" Erosion Control Wattles	LF	440	\$	\$
1.16	Maintenance of Erosion Control	LS	1	\$	\$
1.17	Trailer Dump Station Island Furnished and Installed	LS	1	\$	\$
1.18	Class M6 Fiber Reinforced Concrete Furnished and Installed	CY	12	\$	\$
1.19	Trailer Dump Station Basin Drain Furnished and Installed	EA	2	\$	\$
1.20	Trailer Dump Station Potable Water Tower Furnished and Installed	EA	2	\$	\$
1.21	Trailer Dump Station Non-Potable Water Tower Furnished and Installed	EA	2	\$	\$
1.22	Trailer Dump Station Signage, Sign Posts, and Post Bases	LS	1		
1.23	Existing Water Supply Line Location and Tie-In	LS	1	\$	\$
1.24	1.5" Water Service Line Furnished and Installed	LF	395	\$	\$
1.25	1.5" Stop and Waste Valves Furnished and Installed	EA	1	\$	\$
1.26	Concrete 2000 Gallon Round Septic Tank Furnish and Installed	EA	1	\$	\$
1.27	Concrete 4 Ft. Dia. X 2 Ft. Inspection Riser Furnished and Installed	EA	1	\$	\$
1.28	Lockable Access Hatch Furnished and Installed	EA	1	\$	\$
1.29	6" SCH40 PVC Sewer Line Furnished and Installed	LF	280	\$	\$
1.30	Tie into Existing Force Main Sewer System Manhole	LS	1	\$	\$
1.31	Traffic Control	LS	1	\$	\$
1.32	Salvage Lift Station Equipment and Controls	LS	1	\$	\$
1.33	Replace Lift Station Pump and Equipment	LS	1	\$	\$
1.34	Replace Lift Station Controls	LS	1	\$	\$

1.35	Furnish Spare Pump	LS	1	\$	\$
1.36	Imported Compacted Embankment	CY	100	\$	\$
TOTAL BASE BID					\$

Bid Alternate A

Item No.	Item Description	Unit	Est. Units	Unit Price	Extended Amount
2.00	Unclassified Excavation and Material Salvage	CY	610	\$	\$
2.01	Granular Ballast Material	Tons	1194	\$	\$
TOTAL ALTERNATE A					\$

TOTAL BASE BID and ALTERNATE A					\$
---------------------------------------	--	--	--	--	----

The above unit prices shall include all labor, materials, bailing, shoring removal, overhead, profit, insurance, etc., to cover the finished work of the several kinds called for. Changes shall be processed in accordance with Article 14 of the General Conditions.

The Owner also reserves the unrestricted privilege to reject any unit prices for additions to or deductions from the scheduled amount of work as given in the Bid, if the same are considered excessive or unreasonable, or to accept by including the same in the contract as unit prices applicable in the event of addition to or deduction from the work to be performed under the contract, any or all such unit prices which may be considered fair or reasonable.

The above bid includes all applicable State and Municipal Sales and Use Taxes on materials, and State and Municipal Excise Taxes and all other State and Federal Taxes that would affect the amount of the bid. (See Instructions to Bidders-SD Sales and Use Tax Information for Public Contracts.)

In addition, any material furnished by the State for use in this project is subject to Use Tax and Excise Tax. The total taxable value of materials furnished by the State for this project is **\$0.00**.

A Performance and Payment Bond as required by General Conditions will not be required on contracts which do not exceed One Hundred Thousand Dollars (\$100,000). (See SDCL 5-21-1.1 as amended).

If discrepancies remain at the time of substantial completion, a value will be assigned to each of the discrepancies and two (2) times their estimated value will be retained from payment to the contractor until completed and accepted. (See SDCL 5-18-13 as amended).

Within ten (10) days after Contractor's receipt of the Agreement for Construction, the Contractor shall submit to the Game, Fish and Parks Engineering Section, the executed Agreement for Construction, Performance and Payment Bond, Certificates of Insurance and Affirmative Action Plan (if applicable).

Work shall be commenced within ten (10) consecutive calendar days after written Notice to Proceed by the SD Game, Fish and Parks and shall be substantially completed by September 9, 2022.

The undersigned acknowledges receipt of the following addenda to the drawings and/or specifications (give number and date of each):

Addenda Nos. _____ dated _____ respectively.

The undersigned acknowledges that they have read and understand the Asbestos-Containing Materials Statement contained in the project manual.

Accompanying this proposal is a certified check, cashier's check or draft in the amount of 5% of the base bid and all add alternates, and drawn on a State or National Bank in the amount of \$ _____ or a 10% bid bond issued by a surety authorized to do business in the State of South Dakota, in the amount of \$ _____. *(Not applicable if Bid is under \$100,000.)*

In submitting this bid, it is understood that the right is reserved by the Owner to reject any and all bids and to waive any irregularities. It is further understood by the Bidder that he may not withdraw his Bid within 30 days after the actual opening thereof.

In submitting this bid, bidder asserts it has reviewed all provisions of the General Conditions including the provision for assessment of liquidated delay damages found in Article 10 of the General Conditions. Bidder agrees that the damages anticipated by the Owner in the event of delay in completion of the project are uncertain in amount and difficult to prove; the amount stipulated in Article III of the Agreement for Construction is a reasonable amount in light of the anticipated loss and injury; and the Owner's actual damages in the event of delay would be impracticable or extremely difficult to fix. Bidder agrees to be bound by the liquidated damages set forth in Article III of the Agreement for Construction. Bidder further agrees that the liquidated amount stipulated in Article III of the Agreement for Construction is not a penalty.

BIDDER: _____ (Type Name of Firm)
BY: _____ (Signature of Firm's Representative)
_____ (Type Name and Title of Firm's Representative)
TELEPHONE NO. _____
FACSIMILE NO. _____
E-MAIL ADDRESS _____
BUSINESS ADDRESS _____
MAILING ADDRESS (if different) _____
STATE OF INCORPORATION _____

REVISED MODIFICATION TO BID FORM

**Trailer Dump Station
Roy Lake State Park
Marshall County, South Dakota
GFP Project No. RoyW20Pa**

Date: _____

To: SD Game Fish & Parks Engineering Supervisor
Joe Foss Building, 523 East Capitol, Pierre, South Dakota 57501
Phone: 605-773-6082; Email Modifications: GFPBidMod@state.sd.us

Please make the following modifications to our bid on the referenced project. This modification is per the Instructions to Bidders Item #3 included in the original bid documents and modifies our sealed bid.

Note To Bidder: For unit price and base bid modifications, place an “X” in the appropriate Add/Deduct Box. No amount on this form should reveal your actual bid amount independent of your sealed bid.

Trailer Dump Station, RoyW20Pa

Item No.	Item Description	Unit	Qty.	Add “X”	Deduct “X”	Unit Price Modification	Extended Amount
1.00	Mobilization	LS	1			\$	\$
1.01	Tree Removal and In-Park Disposal	EA	5			\$	\$
1.02	Clearing and Grubbing and In-Park Disposal	LS	1			\$	\$
1.03	Remove and Replace Topsoil	LS	1			\$	\$
1.04	Sawcutting Asphalt Pavement	LF	290			\$	\$
1.05	Existing Asphalt Surfacing Removal and Off-Site Disposal	SY	167			\$	\$
1.06	Unclassified Excavation and Material Salvage	CY	330			\$	\$
1.07	Unclassified Excavation – Undercut	CY	813			\$	\$
1.08	Sewer Line Trench Excavation	CY	207			\$	\$
1.09	Compacted Embankment	CY	105			\$	\$
1.10	Ordinary Shaping	SY	140			\$	\$
1.11	Base Course Furnished and Installed	TON	533			\$	\$
1.12	Geotextile Separator Fabric	SQ	1100			\$	\$
1.13	Asphalt Concrete Composite, Type E2 Furnished and Installed	TON	190			\$	\$

1.14	Seeding and Fertilizing	SY	623			\$	\$	
1.15	12" Erosion Control Wattles	LF	440			\$	\$	
1.16	Maintenance of Erosion Control	LS	1			\$	\$	
1.17	Trailer Dump Station Island Furnished and Installed	LS	1			\$	\$	
1.18	Class M6 Fiber Reinforced Concrete Furnished and Installed	CY	12			\$	\$	
1.19	Trailer Dump Station Basin Drain Furnished and Installed	EA	2			\$	\$	
1.20	Trailer Dump Station Potable Water Tower Furnished and Installed	EA	2			\$	\$	
1.21	Trailer Dump Station Non-Potable Water Tower Furnished and Installed	EA	2			\$	\$	
1.22	Trailer Dump Station Signage, Sign Posts, and Post Bases	LS	1			\$	\$	
1.23	Existing Water Supply Line Location and Tie-In	LS	1			\$	\$	
1.24	1.5" Water Service Line Furnished and Installed	LF	395			\$	\$	
1.25	1.5" Stop and Waste Valves Furnished and Installed	EA	1			\$	\$	
1.26	Concrete 2000 Gallon Round Septic Tank Furnish and Installed	EA	1			\$	\$	
1.27	Concrete 4 Ft. Dia. X 2 Ft. Inspection Riser Furnished and Installed	EA	1			\$	\$	
1.28	Lockable Access Hatch Furnished and Installed	EA	1			\$	\$	
1.29	6" SCH40 PVC Sewer Line Furnished and Installed	LF	280			\$	\$	
1.30	Tie into Existing Force Main Sewer System Manhole	LS	1			\$	\$	
1.31	Traffic Control	LS	1			\$	\$	
1.32	Salvage Lift Station Equipment and Controls	LS	1			\$	\$	
1.33	Replace Lift Station Pump and Equipment	LS	1			\$	\$	
1.35	Furnish Spare Pump	LS	1			\$	\$	
1.36	Imported Compacted Embankment	CY	100			\$	\$	
(CIRCLE ONE)								
BASE BID MODIFICATION TOTAL - ADD OR DEDUCT							\$	

ALTERNATE A

Item No.	Item Description	Unit	Qty.	Add "X"	Deduct "X"	Unit Price Modification	Extended Amount
2.00	Unclassified Excavation and Material Salvage	CY	610			\$	\$
2.01	Granular Ballast Material	Tons	1194			\$	\$
(CIRCLE ONE) ALTERNATE A BID MODIFICATION TOTAL - ADD OR DEDUCT							\$

(CIRCLE ONE) BASE BID and ALTERNATE A BID MODIFICATION TOTAL - ADD OR DEDUCT							\$
---	--	--	--	--	--	--	----

The undersigned acknowledges receipt of the following addenda to the drawings and/or specifications (give number and date of each):

Addenda Nos. _____ dated _____ respectively.

In submitting this facsimile modification bid, it is understood that the right is reserved by the Owner to reject any and all bids and to waive any irregularities. It is further understood by the Bidder that he may not withdraw his Bid within 30 days after the actual opening thereof.

BIDDER: _____ <div style="text-align: center;">(Type Name of Firm)</div>
BY: _____ <div style="text-align: center;">(Signature of Firm's Representative)</div>
_____ <div style="text-align: center;">(Type Name and Title of Firm's Representative)</div>
TELEPHONE NO. _____
FACSIMILE NO. _____
E-MAIL ADDRESS _____
BUSINESS ADDRESS _____
MAILING ADDRESS (if different) _____
STATE OF INCORPORATION _____